
Round Steel Light Poles

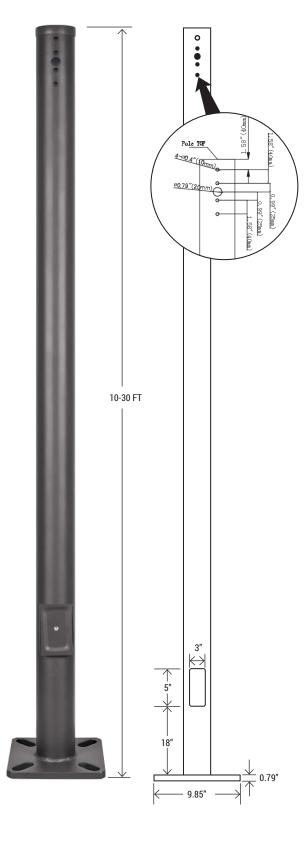

Specifications

Pole Shaft: Constructed from high-strength steel tubing, these poles are available with side drilling for arm-mounted area lighting luminaires or with tenon mounts for flood and post-top luminaires.

Finish: The poles feature a textured architectural powder-coat finish in bronze, black and white, baked to ensure maximum paint adhesion, durability, and esistance to wear.

Hand Hole: A cast iron-reinforced hand hole with a grounding provision is located 1'-6" from the base. It includes a secure cover with attachment hardware, designed for easy electrical connections and maintenance.

Surface Treatment: The poles are hot-dip galvanized for superior corrosion resistance, providing a long-lasting protective layer.

Accessories Included: Each pole comes with a base cover, screw positioning plate anchor bolts, and all necessary mounting hardware.


Optional Accessories: Top options include Tenon Top, Top Cap Only, or Open Top, typically used when the pole top diameter matches the required slip-fit dimensions.

Design Criteria: The published EPA and weight ratings are based on commercial


openings to accommodate arm-mounted installations. If the top adapter is not required, it can be removed and the pole can be sealed with a removable top cap.

design criteria with a 1.3-second gust factor. The pole is manufactured with side

Round Steel Light Poles

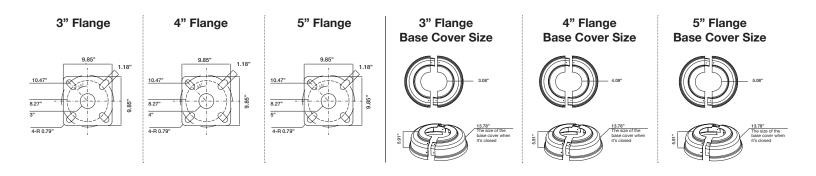


CATALOG	HEIGHT	GAUGE	SIZE	BOLT SIZE	WEIGHT (LBS)	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120
JCL-R10FT3-11G	10ft	11	3" dia.	M0.75"X 19.69"X	72	26.2	22.5	20.1	16.4	11.3	9.6
JCL-R15FT4-11G	15ft		4" dia.		95	17.8	14.6	12.3	10.9	8.2	6.4
JCL-R20FT4-11G	20ft				143	11.9	9.1	8.8	6.8	5.5	3.8
JCL-R25FT4-11G	25ft				176	10.9	7.9	6.7	5.3	4.6	3.1
JCL-R30FT5-11G	30ft		5" dia.	M0.75"X 19.69"X3.94"/ M0.95"X 36"X4"	242	8.5	6.6	5.7	4.2	3.2	2.1

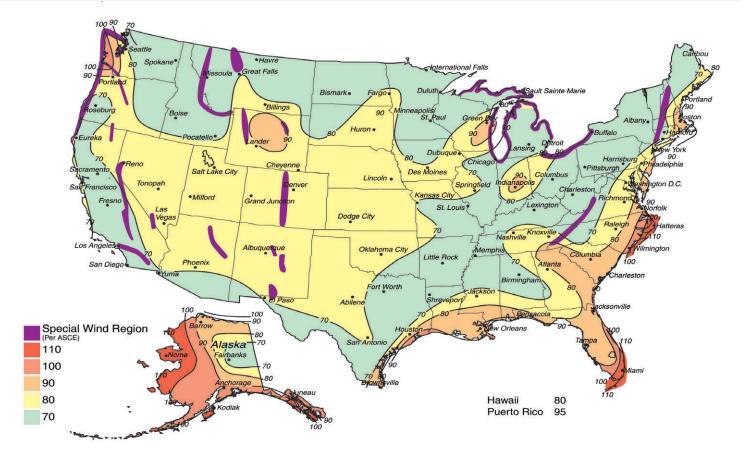

Round Steel Light Poles

ORDERING INFORMATION

EXAMPLE: JCL-R10FT4-11G-DB-TT

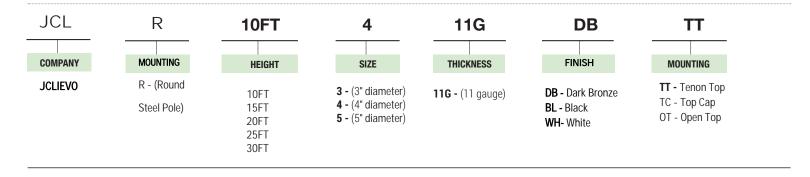

INSTALLATION

