


Tapered Light Poles

Specifications

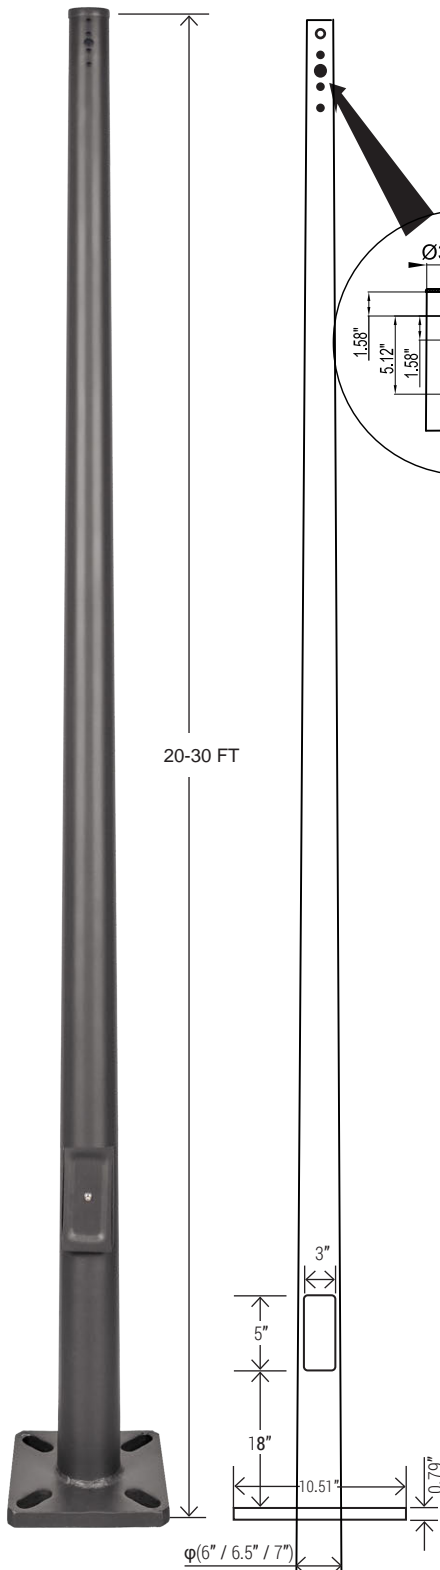

Pole Shaft: Constructed from high-strength steel tubing, these poles are available with side drilling for arm-mounted area lighting luminaires or with tenon mounts for flood and post-top luminaires.

Finish: The poles feature a textured architectural powder-coat finish in bronze, black and white, baked to ensure maximum paint adhesion, durability, and resistance to wear.

Hand Hole: A cast iron-reinforced hand hole with a grounding provision is located 1'-6" from the base. It includes a secure cover with attachment hardware, designed for easy electrical connections and maintenance.

Surface Treatment: The poles are hot-dip galvanized for superior corrosion resistance, providing a long-lasting protective layer.


Accessories Included: Each pole comes with a base cover, screw positioning plate anchor bolts, and all necessary mounting hardware.

Optional Accessories: Top options include Tenon Top, Top Cap Only, or Open Top, typically used when the pole top diameter matches the required slip-fit dimensions.

Design Criteria: The published EPA and weight ratings are based on commercial design criteria with a 1.3-second gust factor. The pole is manufactured with side openings to accommodate arm-mounted installations. If the top adapter is not required, it can be removed and the pole can be sealed with a removable top cap.


Tapered Light Poles

MEASUREMENT

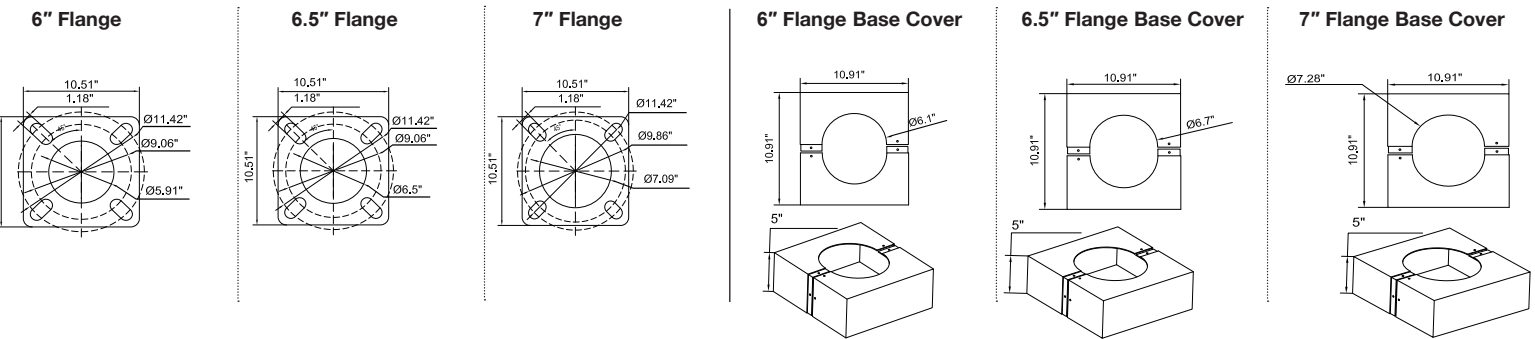

DIMENSION DATA

CATALOG	HEIGHT	GAUGE	SIZE	BOLT SIZE	WEIGHT (LBS)	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120	EPA 130	EPA 140	EPA 150	EPA 160
JCL-TPR20FT6-11G	20ft	11	6" dia.	M0.75"X 19.69"X 3.94"	123	13.9	11.1	10.8	8.8	7.5	5.8	4.6	3.2	2.0	1.1
JCL-TPR25FT6.5-11G	25ft		6.5" dia.		163	12.9	9.9	8.7	7.3	6.6	5.1	4.2	2.8	1.4	NG
JCL-TPR30FT7-7G	30ft	7	7" dia.	M0.95"X 36"X4"	300	10.5	8.8	7.9	6.5	5.4	4.4	3.7	2.4	1.2	NG

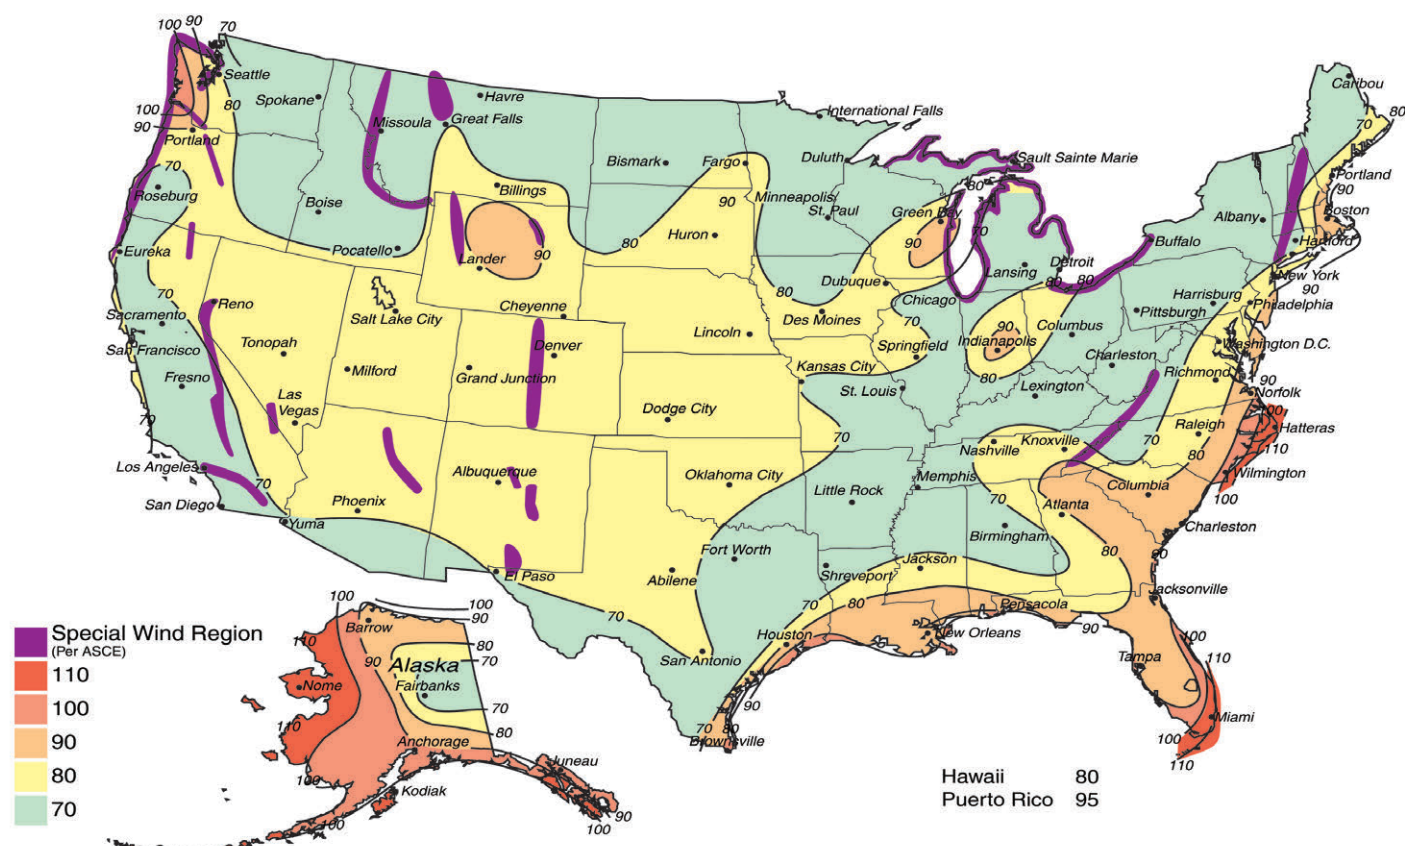

Tapered Light Poles

ORDERING INFORMATION

EXAMPLE: JCL-TPR20FT4-11G-DB-TT

JCL	TPR	20FT	4	11G	DB	TT
COMPANY	MOUNTING	HEIGHT	SIZE	THICKNESS	FINISH	MOUNTING
JCLIEVO	TPR - (Tapered)	20FT 25FT 30FT	6 - (6" diameter) 6.5 - (6.5" diameter) 7 - (7" diameter)	11G - (11 gauge) 7G - (7 gauge)	DB - Dark Bronze BL - Black WH - White	TT - Tenon Top TC - Top Cap OT - Open Top

INSTALLATION

