
Round Steel Light Poles

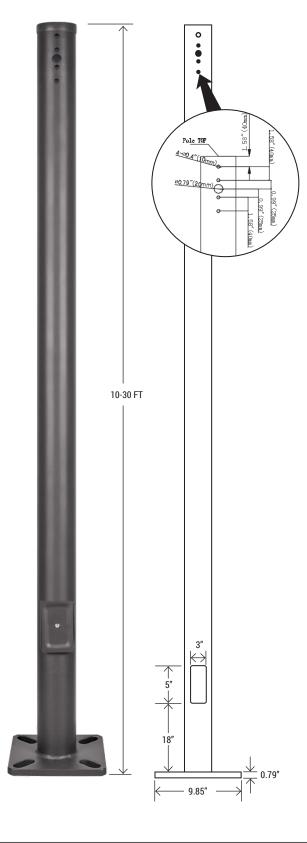

Specifications

Pole Shaft: Constructed from high-strength steel tubing, these poles are available with side drilling for arm-mounted area lighting luminaires or with tenon mounts for flood and post-top luminaires.

or white,baked to ensure maximum paint adhesion,durability,and resistance to wear. **Hand Hole**: A cast iron-reinforced hand hole with a grounding provision is located 1'-

Finish: The poles feature a textured architectural powder-coat finish in bronze, black

6" from the base. It includes a secure cover with attachment hardware, designed for easy electrical connections and maintenance.


Surface Treatment: The poles are hot-dip galvanized for superior corrosion resistance, providing a long-lasting protective layer.

Accessories Included: Each pole comes with a base cover, screw positioning plate, anchor bolts, and all necessary mounting hardware.


Optional Accessories: Top options include Tenon Top,Top Cap Only,or Open Top, typically used when the pole-top diameter matches the required slip-fit dimensions.

Design Criteria: The published EPA and weight ratings are based on commercial design standards with a 1.3-second gust factor. The pole is manufactured with side openings to accommodate arm-mounted installations. If the top adapter is not required, it can be removed and the pole can be sealed with a removable top cap.

Round Steel Light Poles

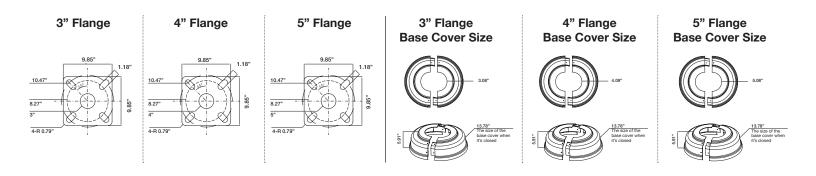


CATALOG	HEIGHT	GAUGE	SIZE	BOLT SIZE	WEIGHT (LBS)	EPA 70	EPA 80	EPA 90	EPA 100	EPA 110	EPA 120
JCL-R10FT3-11G	10ft	11	3" dia.	M0.75"X 19.69"X	72	26.2	22.5	20.1	16.4	11.3	9.6
JCL-R15FT4-11G	15ft		4" dia.		95	17.8	14.6	12.3	10.9	8.2	6.4
JCL-R20FT4-11G	20ft				143	11.9	9.1	8.8	6.8	5.5	3.8
JCL-R25FT4-11G	25ft				176	10.9	7.9	6.7	5.3	4.6	3.1
JCL-R30FT5-11G	30ft		5" dia.	M0.75"X 19.69"X3.94"/ M0.95"X 36"X4"	242	8.5	6.6	5.7	4.2	3.2	2.1

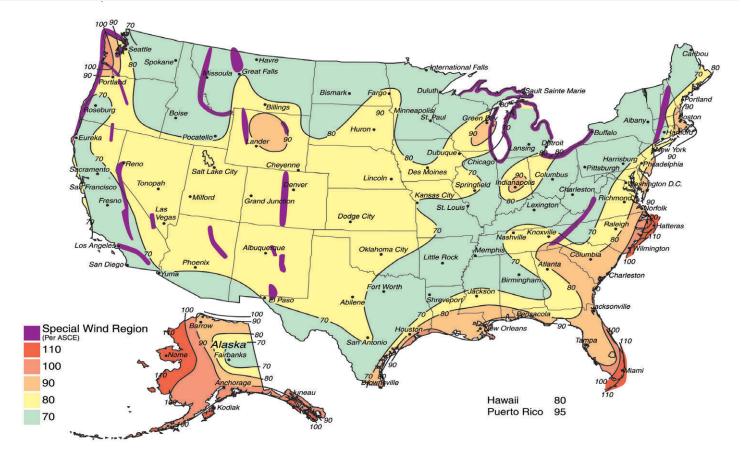

Round Steel Light Poles

ORDERING INFORMATION

EXAMPLE: JCL-R10FT4-11G-DB-TT

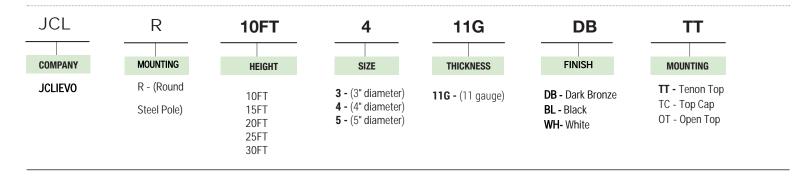

INSTALLATION

